



iAccess™ Ethernet Aggregation Platform - FRM220A Series

IP Based Ethernet Aggregation Platform-FRM220A-CH20

The FRM220A series is a IP based Ethernet aggregation platform, which incorporates a 24+4 port L2 Gigabit Ethernet switch (FRM220A-GSW/SNMP) or a new 20+4 port L2 Gigabit Ethernet switch with 4x10Gigabit uplink (FRM220A-GSW/SNMP-10G). The FRM220A has a built-in Gigabit Ethernet backplane to interconnect the Ethernet access and E1 TDM based inverse multiplexer module cards with the FRM220-GSW/SNMP card. The L2 switch card supports many advanced Layer 2 switch technologies including port and tag based VLAN, QoS, LACP, RSTP to name just a few. The FRM220A chassis solution significantly lowers the OPEX for operator and service provider when deploying fiber access networks.

Specifications

Connectors	Consoles RS232 (DB9)
	LAN 10/100Base-TX RJ45
Physical Specifications	Dimensions 303 x 438 x 88 mm (D x W x H)
	Weight (w/o Power) 5.2kg
Power	AC 18~240VAC
	DC24 18~36VDC
	DC48 36~72VDC

Temperatures	Operating 0~60°C
	Storage -10~70°C
Humidity	5%~90% non-condensing
MTBF	65,000 hrs
Certification	FCC Class A, VCCI Class A, CE, RoHS compliant

FRM220A Module Cards

The product lists designed to be adequately to the FRM220A-CH20 Ethernet aggregation application such as Ethernet access, EDD and Ethernet over PDH are included.

Ethernet Switch



FRM220A-1002ES
2x 10/100/1000Base-T + 2x100/1000Base-X Managed Switch (refer to page 3-33)

FRM220A-1000EAS/X
2x 10/100/1000Base-T + 2x1000Base-X OAM/IP Managed Switch (refer to page 3-34)

EDD



FRM220-MSW202
2x GbE, RJ45 + 2x Dual Rate L2+ OAM Managed Switch (refer to page 3-29)

Inverse Mux



FRM220A-iMux Series
Ethernet over 4/8/16x E1 NTU (refer to page 3-47)


Ethernet over E1 Converters



FRM220A-Eoe1/G(S)
Ethernet Bridge over E1 (GFP) (refer to page 3-55)

FRM220A-Eoe1
Ethernet Bridge over E1 (refer to page 3-56)


Chassis Overview

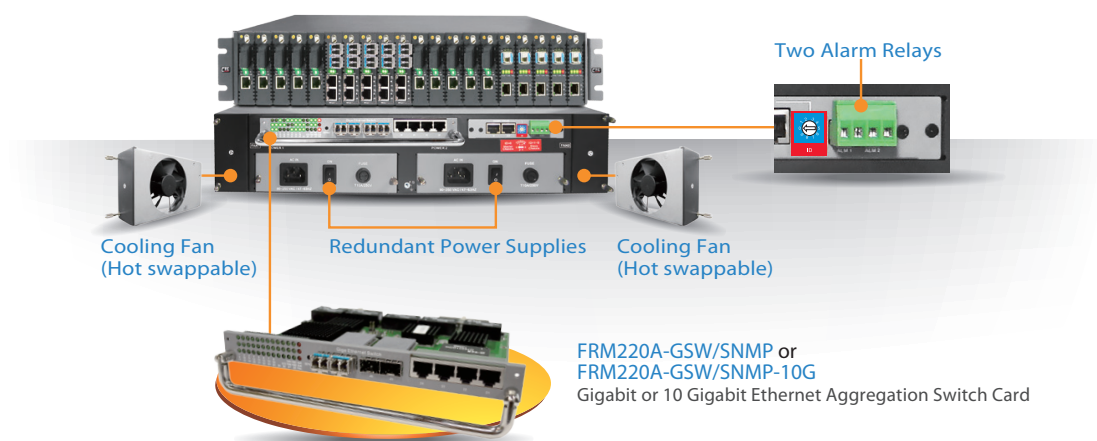

Benefit of FRM220A Chassis Platform


■ Enabling IP Transportation Protection Mechanism - STP/RSTP Featured Ring Protection

- Standard based but advanced fault protection systems
- Rapidly recovery path from failed connection (1-2 seconds min. recovery time)

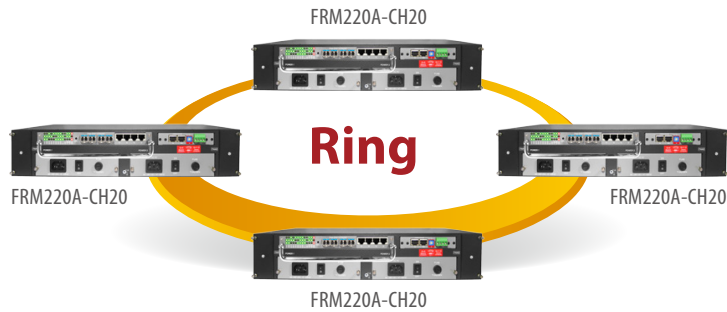


■ LACP Enabled Traffic Aggregation - Fiber Redundant / Trunking Application

- Dynamically port aggregation or trunking to increase bandwidth between LACP peer devices
- Redundant paths to reduce network fault risk

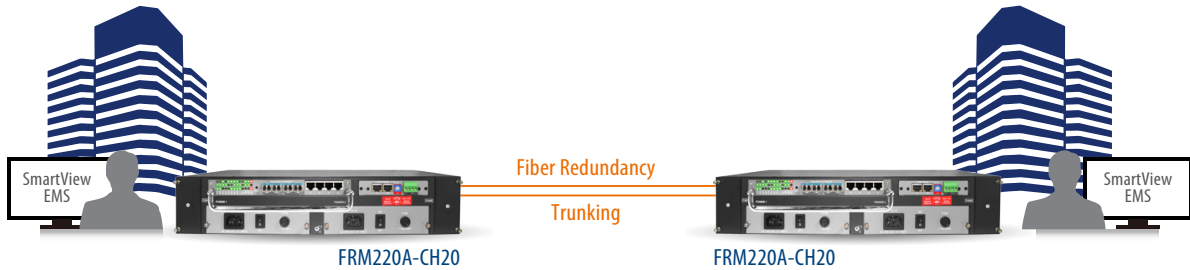

■ Enabling VLAN & QoS Prioritized Multiple Play Services

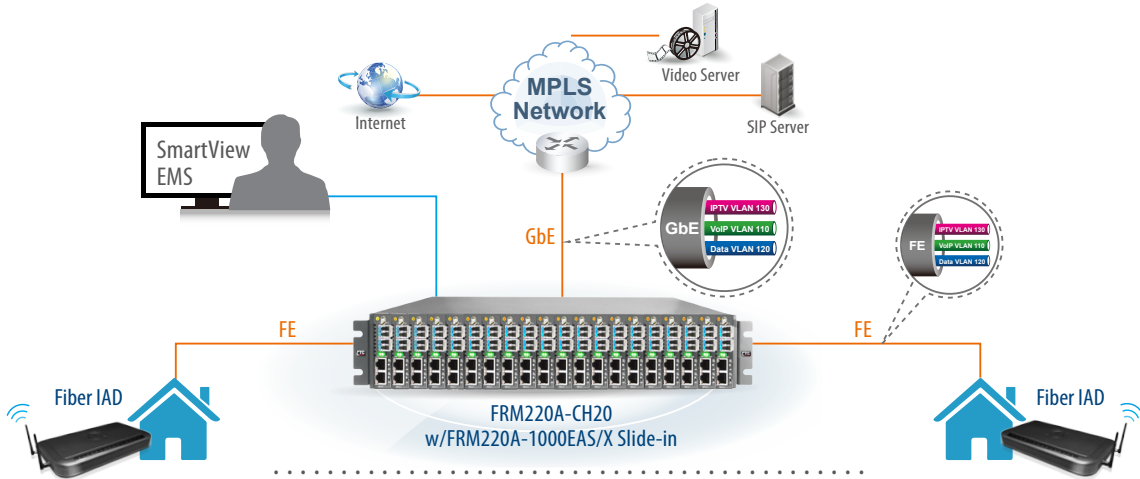

■ Secured Access Control Enhancement - Centralized Management of Accessing the Network for user or device

