


MPIC

Wall Mount Interconnect Cabinet

Description

The double-door Wall mount Interconnect Cabinet (**MPIC**) is available from 6 to 144 (192) fiber capacities. The cabinet is ideal in building entrance terminals, telecommunications closets, computer rooms and other controlled environments where space is limited. This double door cabinet provides segregated access for the end-user and the installer. Both doors are fully removable from base, which allows easy access during installation works and optical network reconfiguration. End-users can reconfigure the connections without exposing the installation workspace. The cable strain-relief is facilitated with dual cable tie "brackets".

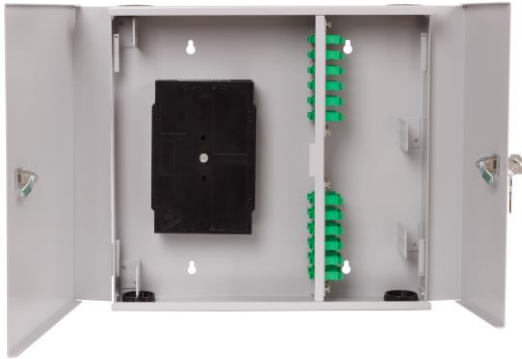

Features

- Protection for facility and user connections
- For FTTH use - holder for micro tubes included
- Removable door – easy access for optical network installation and reconfiguration
- Aluminum material – low weight and shipment costs
- Bend radius protection allows management and rearrangement cable of slack
- Strain-relief for multiple inbound cables
- Labels provided for system documentation
- Optional kit adapts cabinet splice tray
- Durable powder coat finish
- Bonding and grounding stud provided
- Jumper strain relief brackets for outbound cable
- Passed the seismic tests according to ASME standards
- Approved for construction of Nuclear Power Plant Components

Technical specifications

PART NUMBER	NUMBER of CNPM panels	FIBER CAPACITY ¹		DIMENSIONS (HxWxD) mm	SHIP WGT (kg)
		CNPM-XX-06	CNPM-XX-08		
MPIC-4	4	24/48/96	32/64	325 x 360 x 73	1.5
MPIC-6	6	36/72/144	48/96	455 x 360 x 73	2.0
MPIC-8	8	48/96/192	64/128	595 x 360 x 73	2.5

Note:

1) Fiber capacity is valid for standard connector types and depends on connector adaptor type, e.g. in the case DLC it is double capacity and QLC is quadruple capacity. Under the condition that in splice trays then instead of standard protection sleeves there are used smaller and thinner sleeves and there are used 2 lines in one splice holder.


Coupling panels CNPM series (see datasheet CMS_24-01_EN-CNPM) available for the common used connector adapter types in following configuration:

- CNPM-XX-03 3 pcs DSC, QLC adapters
- CNPM-XX-06 6 pcs ST, FC, SC, DSC, E2000, DE2000, DLC, QLC ... adapters
- CNPM-XX-08 8 pcs ST, FC, SC, DLC ... adapters

Product information and specification



MPIC-4 – General view

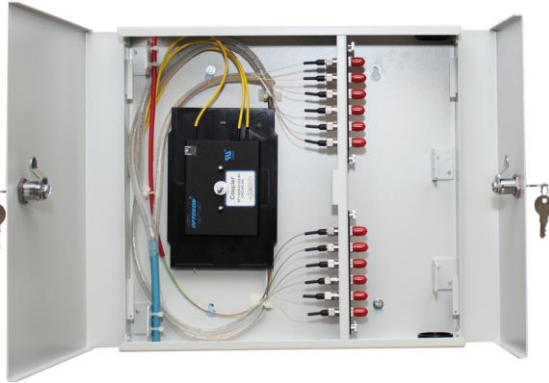

MPIC-4 – Equipped demo

Standard Equipment:

- Mounting kit MK-1 contains*
- 8x Tightening strap 100 x 2.5 mm
 - 2x Tightening strap 190 x 4.8
 - 4x Cable guide
 - 1x 0.6 m Wrapping spiral 6/8
 - 1x 0.6 m Wrapping spiral 10/11
 - Installation manual



Removable door detail view



Internal layout (back view)



Key lock

Metal latch

Ordering Code

MPIC-X - XX - XX(F)¹ X - XX - X /A

Version MPIC-4 MPIC-6 MPIC-8	Fiber Capacity 6, 12, fibers		LM Key lock in front doors ² ZM Metal latch in front doors
Coupling Type ST ST M Multimode SC(F) SC S Singlemode FC FC A APC E2(F) LSH (E2000) DSC(F) Duplex SC DLC(F) Duplex LC QLC(F) Quadruplex LC MU MU MJ MT-RJ		X - Fiber Termination Option B Bend Radius Protectors C Splice Cassette for 12 Splicing X - Number of Splice Cassettes 0 No Cassette 1 – 6 Number of Splice Cassettes (MPIC-4, MPIC-6) 1 - 12 Number of Splice Cassettes (MPIC-8)	

Note: 2) Different keys are possible for the separation two sections of MPIC (Fiber owner and ISP side), please contact OPTOKON, a.s.

Note: 1) "F" – Fixed adaptors by screws



MPIC- 4



MPIC- 6



MPIC- 8