

## IGS-402CSW-4PH

4x GbE RJ45 + 2x 100/1000 SFP with 4x PoE 120W, Compact size



- 4KV surge protection for PoE, UTP and SFP ports
- EN50121-4, EN61000-6-2, EN61000-6-4, CE, FCC certified
- Compact size for easy installation
- Auto checking and auto reset when PoE PD fail



These Gigabit Ethernet switch models are managed industrial grade L2 switches with 4 10/100/1000Base-T ports and 2 GbE/100M SFP ports which also supports PoE+/PSE and provide stable and reliable transmission. Housed in rugged DIN rail or wall mountable enclosures, these switches are designed for harsh environments, such as industrial networking. They are an ideal solution for Smart City, surveillance, Intelligent traffic control systems, production automation applications and support up to 4 PoE/PoE+ (IEEE 802.3af/IEEE 802.3at) ports which can provide 15.4/30watts power output per port for connecting with heavy-duty industrial PoE devices, such as PTZ IP surveillance cameras, high-performance wireless access points, digital signage and IP phones. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

### Features

- Redundant power input
  - Provides 4 port IEEE 802.3af / 802.3at PoE output
  - Cable diagnostics
  - Supports SmartView™ for Centralized Management\*
- \*Please see Chapter 1- [Software Management](#) for more details

### Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet	<b>Network Cable</b>	UTP/STP Cat. 5e cable or above				
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet		EIA/TIA-568 100-ohm (100meter)				
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair		<b>Protocols</b>	CSMA/CD			
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic			<b>Reverse Polarity Protection</b>	Supported for power input		
	IEEE 802.3af	PoE (Power over Ethernet)		<b>Overload Current Protection</b>		Supported		
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)			<b>CPU Watch Dog</b>	Supported		
	IEEE 802.1d	STP (Spanning Tree Protocol)		<b>Power Supply</b>		Redundant Dual DC48V (44~57VDC) Input power (Removable Terminal Block)		
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)			(50~57V input is recommended for IEEE 802.3at PoE+ application)			
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)		<b>Power Consumption</b>	<b>Input Voltage</b>	<b>Total Power Consumption</b>	<b>Device Power Consumption</b>	<b>Power Budget</b>
	IEEE 802.1Q	Virtual LANs (VLAN)			50VDC	130W	8.2W	120W
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication		<b>PoE Power Budget</b>	Maximum PoE Output power budget 120W, (30W/per port)			
	IEEE802.3ac	Max frame size extended to 1522Bytes			<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green)		
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)		Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)				
	IEEE 802.3x	Flow control for Full Duplex		SFP Fiber Per port: 100 Link/Active (Green) 1000 Link/Active (Amber)				
	IEEE 802.1ad	Stacked VLANs, Q-in-Q		PoE Port LED 1 LED /per Port :				
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization		• PoE Output Power On : ON (Green)				
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)		• PoE Output Power Off : Off				
	IEEE 802.3az	EEE (Energy Efficient Ethernet)		<b>Jumbo Frame</b>	10K			
	<b>Switch Architecture</b>	Back-plane (Switching Fabric): 12Gbps		<b>IEEE802.3ac</b>	Max frame size extended to 1522Bytes (allow Q-tag in packet)			
Full wire-speed		<b>MAC Address Table</b>	4K					
<b>Data Processing</b>	Store and Forward		<b>Memory Buffer</b>	1.75M bits for packet buffer				
<b>Flow Control</b>	IEEE 802.3x for full duplex mode Back pressure for half duplex mode		<b>Device Memory</b>	128M Bytes Flash ROM, 256M Bytes RAM				
<b>Network Connector</b>	4x 10/100/1000Base-T RJ-45 + 2x FE/GbE SFP slot		<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message				
	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function, SFP ports support FE/GbE with DDMI		<b>Removable Terminal Block</b>	Provide 2 redundant power 4 Pin				
<b>PoE standard &amp; RJ-45 pin assignment</b>	4x IEEE 802.3af /IEEE 802.3at PoE+		<b>Operating Temperature</b>	-10 ~ 60°C (IGS-402CSW-4PH)				
	End-Span, Alternative A mode.			-40 ~ 75°C (IGS-402CSW-4PHE)				
	Positive (V+) : RJ-45 pin 1, 2.		<b>Operating Humidity</b>	5% to 95% (Non-condensing)				
	Negative (V-) : RJ-45 pin 3, 6.		<b>Storage Temperature</b>	-40 ~ 85°C				
<b>Console</b>	Data (1,2,3,6,4,5,7,8)		<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless				
	RS-232 (RJ-45)		<b>Dimensions</b>	106x 38.6x 142mm (Dx Wx H)				

<b>Weight</b>	820g
<b>Installation Mounting</b>	DIN Rail mounting, or wall mounting (Optional)
<b>MTBF</b>	820,215Hours (MIL-HDBK-217)
<b>Warranty</b>	5 years
<b>Certification</b>	
<b>EMC</b>	CE (EN55032, EN55035)
<b>EMI (Electromagnetic Interference)</b>	FCC Part 15 Subpart B Class A,CE
<b>Railway Traffic</b>	EN50121-4
<b>Immunity for Heavy Industrial Environment</b>	EN61000-6-2
<b>Emission for Heavy Industrial Environment</b>	EN61000-6-4


<b>EMS (Electromagnetic Susceptibility) Protection Level</b>	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
<b>Safety</b>	EN62368-1 (Pending)
<b>Surge protection</b>	4KV for PoE, UTP and Fiber ports
<b>Shock</b>	IEC 60068-2-27
<b>Freefall</b>	IEC 60068-2-31
<b>Vibration</b>	IEC 60068-2-6

## Software Specifications

<b>Topology</b>	
<b>VLAN</b>	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR ( Multicast VLAN Registration) Voice VLAN
<b>Link Aggregation (Port Trunk)</b>	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
<b>Spanning Tree</b>	IEEE 802.1d STP IEEE 802.1w RSTP IEEE 802.1s MSTP
<b>Loop Protection</b>	Supported
<b>QoS Features</b>	
<b>Class of Service</b>	IEEE 802.1p 8 active priorities queues for per port
<b>Traffic Classification QoS</b>	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
<b>Bandwidth Control for Ingress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
<b>Bandwidth Control for Egress</b>	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
<b>DiffServ (RF 2474) Remarkng</b>	
<b>Storm Control</b>	for Unicast, Broadcast, Multicast
<b>IP Multicasting Features</b>	
<b>IGMP / MLD Snooping</b>	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
<b>Security Features</b>	
<b>IEEE 802.1X</b>	Port-Based MAC-Based
<b>ACL</b>	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
<b>RADIUS authentication &amp; accounting</b>	
<b>TACACS+ authentication &amp; accounting, TACACS+ 3.0</b>	
<b>HTTPS, HTTP</b>	Supported
<b>SSL / SSH v2</b>	Supported
<b>User Name Password Authentication</b>	Local Authentication Remote Authentication (via RADIUS / TACACS+)

<b>Management Interface Access Filtering</b>	Web, Telnet / SSH, CLI RS-232 console
<b>Management Features</b>	
<b>CLI</b>	Cisco® like CLI
<b>Web Based Management</b>	
<b>Telnet</b>	Supports for management and monitoring
<b>SNMP</b>	V1, V2c, V3
<b>sFlow</b>	Supported
<b>ModBus/TCP</b>	Supports management and monitoring
<b>SW &amp; Configuration Upgrade</b>	TFTP, HTTP Redundant firmware in case of upgrade failure
<b>FTP client</b>	Supports for upload/download configuration
<b>RMON</b>	RMON I (1, 2, 3, 9 group), RMON II
<b>MIB</b>	RFC1213 MIB II, Private MIB
<b>UPnP</b>	Supported
<b>BOOTP</b>	Supported
<b>DHCP</b>	Server, Client, Relay, Relay option 82 , Snooping
<b>RARP</b>	Supported
<b>IP Source Guard</b>	Supported
<b>Port Mirroring</b>	Supported
<b>Event Syslog</b>	Syslog server (RFC3164)
<b>Warning Message</b>	System syslog, e-mail
<b>DNS</b>	Client, Proxy
<b>NTP</b>	Client
<b>LLDP (IEEE 802.1ab)</b>	Link Layer Discovery Protocol LLDP-MED
<b>IPv6 Features</b>	
<b>IPv6 Management</b>	Telnet Server/ICMP v6
<b>SNMP over IPv6</b>	Supported
<b>HTTP over IPv6</b>	Supported
<b>SSH over IPv6</b>	Supported
<b>IPv6 Telnet</b>	Supported
<b>IPv6 NTP</b>	Client
<b>IPv6 TFTP</b>	Supported
<b>IPv6 QoS</b>	Supported
<b>IPv6 ACL</b>	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
<b>Others Features</b>	
<b>Green Ethernet</b>	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link
<b>Cable Diagnostic</b>	Measuring UTP cable normal or broken point distance
<b>Advanced PoE Management</b>	
PoE PD failure auto checking ,and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Power feeding priority Total PoE Power budge limitation (maximum 120W)	

## Dimensions

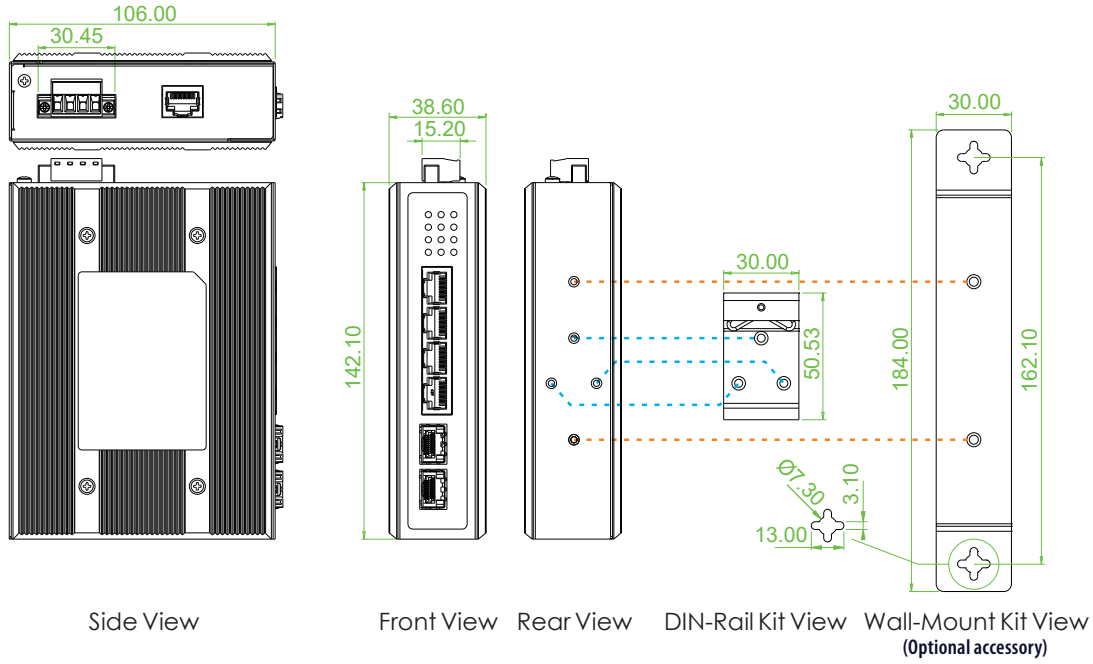

Side View

Front View

Rear View

DIN-Rail Kit View

Wall-Mount Kit View  
(Optional accessory)

## Ordering Information

Model Name	Total Port	RJ45	Fiber	PoE Port		Input Power	Certification		Operating Temperature
		10/100/1000 Base-T	100/1000 Base-X	IEEE802.3at	Power Budget	Redundant	Railway EN50121-4	CE, FCC EN61000-6-2 EN61000-6-4	
IGS-402CSW-4PH	6	4	2 SFP	4	120W	48VDC	V	V	-10~60°C
IGS-402CSW-4PHE	6	4	2 SFP	4	120W	48VDC	V	V	-40~75°C

### Package List

- IGS-402CSW-4PH device
- Console cable (RJ-45 to DB9)
- Din Rail with screws
- Terminal block
- Protective caps for SFP ports

## Optional Accessories

### Wall Mount Kit

IND-WMK01 Wall Mount kit for Industrial product (184x30mm) (Narrow)

### Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP data sheets for more items and detailed information.)

ISFP-M7000-85-D(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-S7020-31-D(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-T7T00-00-(E) Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)

ISFP-M5002-31-D(E) Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-S5030-31-D(E) Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

### Industrial Power Supply

NDR-120-48 Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 120W, -20 ~ +70°C (For IGS-402CSW-4PH)

NDR-240-48 Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ +70°C (For more ref.)

6 Industrial Compact Web Managed PoE Switch IGS-402CSW-4PH