

## IGR-2408SM-24PH

Layer 3 24x GbE RJ45 + 8x 100/1000Base SFP with 24x PoE 400W 48VDC

**NEW**

**4KV Surge protection**



- L3 IPV4/IPV6 Static Routing, RIP v2 Dynamic Routing, OSPF v2/v3 Dynamic Routing
- Supports IEEE 1588 PTP V2
- Supports u-Ring, ERPS, EPS, MSTP, RSTP, STP for redundant cabling
- EN62368-1, CE, FCC certified
- 4KV surge protection for PoE, RJ45 and SFP ports



As an Industrial grade Layer 3 Ethernet switch, the IGR-2408SM-24PH provides full Gigabit capability with high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. IGR series has 8x Gigabit SFP slots and 24x Gigabit RJ45 Ethernet ports with PoE. They support Layer 3 routing function, ERPS ring, RSTP/STP and u-Ring redundancy technologies, support wide operating temperature, fanless design, to increase system reliability and the availability of your network.

### Features

- Maximum up to 24x IEEE 802.3af / 802.3at PoE+ output, 30W per port, 400W PoE power budget in total
- Redundant dual input power 48VDC (44~57VDC)
- STP, RSTP, MSTP, ITU-T G.8032 Ethernet Ring Protection Switching (ERPS) for network redundancy
- Provides 5 instances each can support  $\mu$ -Ring,  $\mu$ -Chain or Sub-Ring for flexible networking applications
- $\mu$ -Ring redundancy, recovery time <20ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports SmartView™ for Centralized Management\*

\*Please see Chapter 1- **Software Management** for more details

### Specifications

<b>Standard</b>	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3ab	1000Base-T Gbit/s Ethernet over twisted pair
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	ITU-T G.8031 / Y.1342	EPS (Ethernet Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancement)
	IEEE 802.3X	Flow control for full duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
	IEEE 802.3az	EEE (Energy Efficient Ethernet)
<b>VLAN ID</b>	4094	IEEE802.1Q VLAN VID
<b>Switch Architecture</b>	Back-plane (Switching Fabric): 64Gbps (Full wire-speed)	
<b>Data Processing</b>	Store and Forward	
<b>Network Connector</b>	<b>SFP:</b> 8x 100/1000Base-X SFP socket Support DDMI  <b>RJ45:</b> 24x 10/100/1000Base-T RJ-45 Support Auto negotiation speed, Auto MDI/MDI-X function  <b>PoE:</b> 24x IEEE 802.3af / IEEE 802.3at PoE+ End-Span, Alternative A mode. Maximum 30W per port, 400W PoE power budget in total  <b>RJ45 Pin Assignment:</b> PoE Positive (V+): RJ-45 pin 1, 2. PoE Negative (V-): RJ-45 pin 3, 6. Data (1,2,3,6,4,5,7,8)	

<b>Console</b>	RS-232 (RJ-45)
<b>Network Cable</b>	UTP/STP Cat.5e cable or above EIA/TIA-568 100-ohm (100meter)
<b>Protocols</b>	CSMA/CD
<b>Reverse Polarity Protection</b>	For input power
<b>Overload Current Protection</b>	Supported
<b>CPU Watch Dog</b>	Supported
<b>Power Supply</b>	Redundant dual input power 48VDC (44~57VDC) (Removable terminal block) (50~57VDC input is recommended for IEEE802.3at PoE+ in 30W applications)
<b>Power Consumption</b>	< 30W @50VDC without PoE load <445W @50VDC with 400W PoE load
<b>LED</b>	Per unit: Power 1 (Green), Power 2 (Green), Act /Alarm (Green/Amber), Ring Master (Green)  P1~P24 Per RJ-45 port: 10/100 Link/Active (Green) 1000 Link/Active (Amber)  P25~P32 Per SFP Fiber port: Link/Active (Amber)  PoE port (P1~P24): PoE ON (Green)
<b>Jumbo Frame</b>	10K Byte
<b>MAC Address Table</b>	32K
<b>Memory Buffer</b>	4M Bytes for packet buffer
<b>Device Memory</b>	16M Bytes Flash ROM, 1G Bytes RAM
<b>Warning Message</b>	System Syslog, SMTP/ e-mail event message, alarm relay
<b>Alarm Relay Contact</b>	Relay outputs with current carrying capacity of 1A @24VDC, 2-Pin removable terminal block
<b>Operating Temperature</b>	-40 ~ 75°C
<b>Operating Humidity</b>	5% to 95% (Non-condensing)
<b>Storage Temperature</b>	-40 ~ 85°C
<b>Housing</b>	Rugged Metal, IP30 Protection, Fanless
<b>Dimensions</b>	280x 440 x 44mm (D x W x H)
<b>Weight</b>	4.26kg
<b>Installation Mounting</b>	19" rack mount
<b>MTBF</b>	97,078 Hours (MIL-HDBK-217)
<b>Warranty</b>	5 years

Certification	
EMC	CE (EN55032, EN55035)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A

## Software Specifications

L3 Routing	
IPv4/v6 Static Routing	Supported
RIP v2 Dynamic Routing	Supported
OSPF v2 Dynamic Routing	Supported
Topology	
VLAN	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration) Voice VLAN
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 16 trunk group Dynamic (IEEE 802.3ad LACP), up to 16 trunk group Per group up-to 8 port
Spanning Tree	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
Multiple $\mu$ -Ring	Up to 5 instances each support $\mu$ -Ring, $\mu$ -Chain or Sub-Ring for flexible networking applications. Recovery time <20ms The maximum number of device is allowed 250 in a Ring.
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms
ITU-T G.8031 / Y.1342 EPS (Ethernet Protection Switching)	Single Ring, Sub-Ring, Multiple ring topology
QoS Features	Supported
Class of Service	IEEE 802.1p 8 active priorities queues per port
Traffic Classification QoS	IEEE 802.1p based CoS IP Precedence based CoS IP DSCP based CoS
Traffic Classification QoS	QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	Per port based
Bandwidth Control for Egress	Per queue / Per port shaper
DiffServ (RF 2474) Remarkig	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling, Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SA/DA, Subnet L4 : TCP/UDP
RADIUS authentication & accounting	

Safety	EN62368-1
Surge protection	4KV for PoE, RJ45 and SFP ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported
sFlow	Supported
User Name Password Authentication	Local Authentication
Authentication	Remote Authentication (via RADIUS / TACACS+)
Management	
Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
sFlow	Supported
Modbus/TCP	Support for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP
RMON	Redundant firmware in case of upgrade failure
MIB	RMON I (1, 2, 3, 9 group), RMON II
UPnP	RFC1213 MIB II, Private MIB
UPnP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
IP Source Guard	Supported
Mirroring	Local and Remote
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Supports 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP V4.0, SNTP	Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3 : IP address SIP, Subnet (32bit) L4 : TCP/UDP
Advanced PoE Management	
Advanced PoE Management	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power limit by management Total PoE Power budge limitation management: Maximum 400W power budget Power feeding priority
Other Features	
Other Features	Green Ethernet Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management : Adjustment LEDs intensity Cable Diagnostic Measuring UTP cable normal or broken point distance

## Dimensions


Rear View



Front View

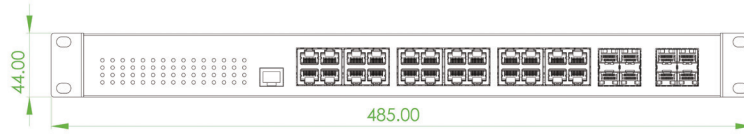

Top View

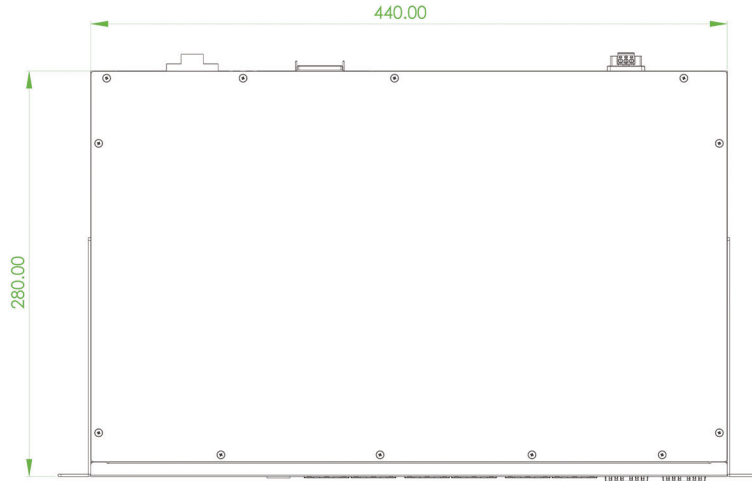

Side View



## Ordering Information

Model Name	Managed	Total Port	RJ45 Port	SFP Port	PoE Port		Input Power	Certification		Operating Temperature
			10/100/1000 Base-T(X)	100/1000 Base-X	IEEE 802.3at	Power Budget	48VDC	Safety EN62368-1	CE, FCC	
IGR-2408SM-24PHE	V	32	24	8	24	400W	2	V	V	-40~75°C

### Package List

- IGR-2408SM-24PH device
- 19" rack-mount kit (brackets and screws)
- Console cable (RJ-45 to DB-9)
- Protective caps for SFP ports

## Optional Accessories

### Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with all CTC Union industrial grade Ethernet switches for guaranteed compatibility and performance. Best performance can be guaranteed, even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheets for more items and detailed information.)

ISFP-M7000-85-D(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S7020-31-D(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-D(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDML, -10~70°C (-40~85°C)
ISFP-S5030-31-D(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDML, -10~70°C (-40~85°C)

### Industrial Power Supply

NDR-480-48	Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ +70°C
------------	---