

IFS-402GSM-4PU

4x 10/100Base RJ45 + 2x 100/1000Base-X SFP with 4x 60W PoE 240W, 48VDC



- Supports IEEE 1588 PTP V2
- Supports u-Ring, ERPS, MSTP, RSTP, STP for redundant cabling
- Auto checking and auto reset when PoE PD fail
- EN50121-4, UL60950-1, EN60950-1, EN61000-6-2, EN61000-6-4, CE, FCC certified
- 4KV surge protection for PoE, RJ45 and SFP ports



Ver.2022 Aug

IFS-402GSM-4PU is a managed, industrial grade, L2 PoE (Power over Ethernet) switch that provide 4x 10/100Base-TX ports plus 2x 100/1000Base-X SFP ports with 4x PoE Ports. The PoE features enable power and data to be transferred via a single cable, hereby considerably reducing cabling and electrical wiring expenses. Housed in rugged DIN rail or wall mountable IP-30 enclosures, these switches are perfect choices for harsh environments, such as industrial networks, intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. The switch can also operate either at standard operating temperature range (-10 to 60°C) or at wide operating temperature range (-40 to 75°C) to fulfill the special needs of industrial automation applications.

Features

- 48VDC (44~57VDC) redundant dual input power
- Provides 4 port IEEE 802.3af / 802.3at PoE+ output, 60W per port
- Cable diagnostics, identifies opens/shorts distance
- Provides 5 ring instances that each can support u-Ring, u-Chain or Sub-Ring type for flexible uses. Supports up to 5 rings in one device (Please see CTC u-Ring white paper for more details and more topology application)
- u-Ring for Redundant Cabling, recovery time<10ms in 250 devices
- Supports IEEE 1588 PTP V2 for precise time synchronization to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Provides SmartConfig for quick and easy mass Configuration Tool*
- Supports SmartView™ for Centralized Management Tool*

*Please see Chapter 1- **Software Management** for more details

Specifications

Standard	IEEE 802.3	10Base-T 10Mbit/s Ethernet
	IEEE 802.3u	100Base-TX, 100Base-FX, Fast Ethernet
	IEEE 802.3z	1000Base-X Gbit/s Ethernet over Fiber-Optic
	IEEE 802.3af	PoE (Power over Ethernet)
	IEEE 802.3at	PoE+ (Power over Ethernet enhancements)
	IEEE 802.1d	STP (Spanning Tree Protocol)
	IEEE 802.1w	RSTP (Rapid Spanning Tree Protocol)
	IEEE 802.1s	MSTP (Multiple Spanning Tree Protocol)
	ITU-T G.8032 / Y.1344	ERPS (Ethernet Ring Protection Switching)
	IEEE 802.1Q	Virtual LANs (VLAN)
	IEEE 802.1X	Port based and MAC based Network Access Control, Authentication
	IEEE 802.3ac	Max frame size extended to 1522Bytes
	IEEE 802.3ad	Link aggregation for parallel links with LACP(Link Aggregation Control Protocol)
	IEEE 802.3x	Flow control for Full Duplex
	IEEE 802.1ad	Stacked VLANs, Q-in-Q
	IEEE 802.1p	LAN Layer 2 QoS/CoS Protocol for Traffic Prioritization
	IEEE 802.1ab	Link Layer Discovery Protocol (LLDP)
IEEE 802.3az	EEE (Energy Efficient Ethernet)	
Switch Architecture	Back-plane (Switching Fabric): 4.8Gbps	
	Full wire-speed	
Data Processing	Store and Forward	
	Full wire-speed	
Flow Control	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
	IEEE 802.3x for full duplex mode Back pressure for half duplex mode	
Network Connector	4x 10/100Base-TX RJ-45 + 2x 100/1000Base-X SFP connector	
	RJ-45 UTP port support Auto negotiation speed, Auto MDI/MDI-X function,	
	SFP port support 100/1000M dual speed with DDMI RS-232 (RJ-45)	
Console	RS-232 (RJ-45)	
PoE standard & RJ-45 Pin Assignment	4x IEEE 802.3at/ 802.3af PoE+	
	4 pairs PoE, 60W/port	
	End-Span, Alternative A and B mode.	
	Positive (V+) : RJ-45 pin 1, 2, 4, 5 Negative (V-) : RJ-45 pin 3, 6, 7, 8	

Network Cable	UTP/STP Cat. 5e cable or above		
	EIA/TIA-568 100-ohm (100m)		
Protocols	CSMA/CD		
	Reverse Polarity Protection Supported for power input		
Overload Current Protection	Supported		
	CPU Watch Dog Supported		
Power Supply	Redundant Dual DC 48V (44~57VDC) input power, (Removable terminal block)		
	50~57V input is recommended for IEEE 802.3at PoE+ in 30W / 60W applications)		
Power Consumption	Input Voltage	Total Power Consumption	Device Power Consumption
	50VDC	248.5W	8.5W
PoE Power Budget	Maximum PoE Output power budget 60W / Per Port 240W for total		
	LED		
Per unit: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow)			
Per RJ-45 port: 10/100 Link/Active (Green)			
SFP Fiber Per port: Link/Active (Green)			
PoE Port LED 1 LED /per Port :			
• PoE Output Power On : ON (Green)			
• PoE Fault (Over Load, Short Circuit,Port failed at Startup) : Flash 1times/sec (Green)			
Jumbo Frame	9.6KB		
IEEE802.3ac	Max frame size extended to 1522Bytes (allow Q-tag in packet)		
MAC Address Table	8K		
Memory Buffer	512K Bytes for packet buffer		
Device Memory	16M Bytes Flash ROM, 128M Bytes RAM		
Warning Message	System Syslog, SMTP/ e-mail event message, alarm relay		
Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC		
Removable Terminal Block	Provide 2 redundant power, alarm relay contact, 6 Pin		
Operating Temperature	-10 ~ 60°C (IFS-402GSM-4PU) -40 ~ 75°C (IFS-402GSM-4PUE)		
Operating Humidity	5% to 95% (Non-condensing)		

6 Industrial FE PoE Switch IFS-402GSM-4PU

Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection, Fanless
Dimensions	106 x 62.5 x 135 mm (D x W x H)
Weight	0.7kg
Installation Mounting	DIN Rail mounting, or wall mounting (Optional)
MTBF	589,078 hours (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE (EN55024, EN55032)
EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE
Railway Traffic	EN50121-4
Immunity for Heavy Industrial Environment	EN61000-6-2

Emission for Heavy Industrial Environment	EN61000-6-4
EMS (Electromagnetic Susceptibility) Protection Level	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (Burst) Level 3, Criteria A EN61000-4-5 (Surge) Level 3, Criteria B EN61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A
Safety	UL60950-1, EN60950-1, EN62368-1
Surge protection	4KV for PoE, UTP and Fiber ports
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6


Software Specifications

Topology VLAN	
	IEEE 802.1q VLAN, up to 4094 802.1Q VLAN VID IEEE 802.1q VLAN, up to 4094 Groups IEEE 802.1ad Q-in-Q MAC-based VLAN, up to 256 entries IP Subnet-based VLAN, up to 128 entries Protocol-based VLAN (Ethernet, SNAP, LLC), up to 128 entries VLAN Translation, up to 256 entries Private VLAN for port isolation GVRP (GARP VLAN Registration Protocol) MVR (Multicast VLAN Registration)
Link Aggregation (Port Trunk)	Static (Hash with SA, DA, IP, TCP/UDP port), up to 5 trunk group Dynamic (IEEE 802.3ad LACP), up to 5 trunk group
Spanning Tree	IEEE 802.1d STP, IEEE 802.1w RSTP, IEEE 802.1s MSTP
Multiple μ-Ring	up to 5 instances that each supports μ-Ring, μ-Chain or Sub-Ring type for flexible uses, and maximum up to 5 Rings Recovery time <10ms The maximum number of devices allowed in a Ring supported ring is 250 (Please see CTC Union μ-Ring white paper for more details and more topology application)
Loop Protection	Supported
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection)	Recovery time <50ms Single Ring, Sub-Ring, Multiple ring topology network
QoS Features	
Class of Service	IEEE 802.1p 8 active priorities queues for per port
Traffic Classification QoS	IEEE 802.1p based CoS, IP Precedence based CoS IP DSCP based CoS QCL(QoS Control List): Frame Type, Source/Destination MAC, VLAN ID, PCP, DEI QCE(QoS Control Entry): Protocol, Source IP, IP Fragment, DSCP, TCP/UDP port number
Bandwidth Control for Ingress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps"
Bandwidth Control for Egress	100~1,000,000 when the "Unit" is "kbps" and 1~1,000 when the "Unit" is "Mbps" Per queue / Per port shaper
DiffServ (RF 2474) Remarking	
Storm Control	for Unicast, Broadcast, Multicast
IP Multicasting Features	
IGMP / MLD Snooping	IGMP Snooping v1, v2, v3 / MLD Snooping v1, v2 Port Filtering Profile Throttling Fast Leave Maximum Multicast Group : up to 1022 entries Query / Static Router Port
Security Features	
IEEE 802.1X	Port-Based MAC-Based
ACL	Number of rules : up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SA/DA, Subnet L4: TCP/UDP
RADIUS authentication & accounting	
TACACS+ authentication & accounting, TACACS+ 3.0	
HTTPS, HTTP	Supported
SSL / SSH v2	Supported


User Name	Local Authentication
Password Authentication	Remote Authentication (via RADIUS / TACACS+)
Management Interface Access	Web, Telnet / SSH , CLI RS-232 console
Filtering	
Management Features	
CLI	Cisco® like CLI
Web Based Management	
Telnet	Server
SNMP	V1, V2c, V3
Modbus/TCP	Supports for management and monitoring
SW & Configuration Upgrade	TFTP, HTTP Redundant firmware in case of upgrade failure
FTP client	Supports for upload/download configuration
RMON	RMON I (1, 2, 3, 9 group), RMON II
MIB	RFC1213 MIB II, Private MIB
UPnP	Supported
BOOTP	Supported
DHCP	Server, Client, Relay, Relay option 82 , Snooping
RARP	Supported
IP Source Guard	Supported
Port Mirroring	Supported
Event Syslog	Syslog server (RFC3164)
Warning Message	System syslog, e-mail, alarm relay
DNS	Client, Proxy
IEEE1588 PTP V2	Support 5 operating mode in each port : Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave
NTP, SNTP	Server/Client
LLDP (IEEE 802.1ab)	Link Layer Discovery Protocol LLDP-MED
IPv6 Features	
IPv6 Management	Telnet Server/ICMP v6
SNMP over IPv6	Supported
HTTP over IPv6	Supported
SSH over IPv6	Supported
IPv6 Telnet	Supported
IPv6 NTP, SNTP	Server/Client
IPv6 TFTP	Supported
IPv6 QoS	Supported
IPv6 ACL	Number of rules: up to 256 entries for L2 / L3 / L4 L2 : Mac address SA/DA/VLAN L3: IP address SIP, Subnet (32bit) L4: TCP/UDP
Others Features	
Green Ethernet	Supports IEEE 802.3az EEE (Energy Efficient Ethernet) Management to optimize the power consumption Determine the cable length and lowering the power for ports with short cables Lower the power for a port when there is no link LED Power Management :Adjustment LEDs intensity
Cable Diagnostic	Measuring UTP cable normal or broken point distance
Advanced PoE Management	
	PoE PD failure auto checking, and auto reset when PD fail PoE port on/off weekly scheduling PoE Configuration PoE Enable/Disable Power limit by classification Power feeding priority Total PoE Power budget limitation: maximum 240W

Application

Figure : Application Example

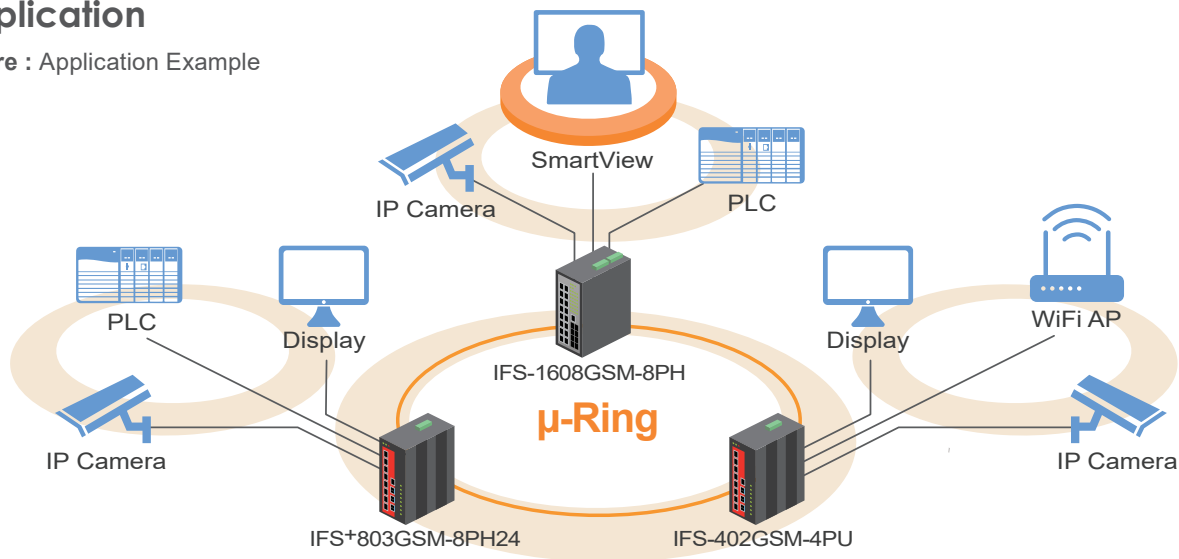

Dimensions

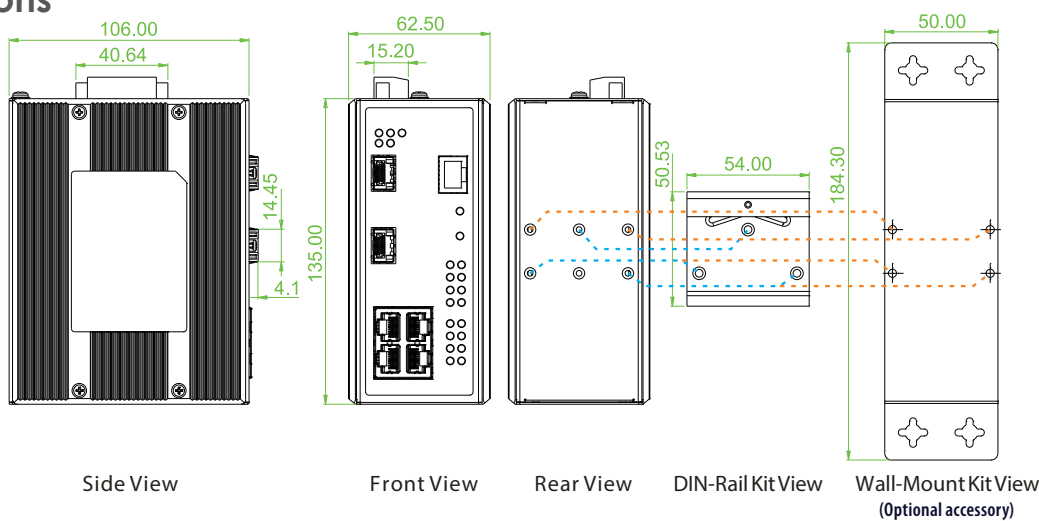

Ordering Information

Model Name	Total Port	UTP		Fiber	PoE Port		Input Power		Certification			Operating Temperature
		10/100 Base-TX	100/1000 Base-X	100/1000 Base-X	IEEE 802.3at 4 pairs PoE/60W	Power Budget	Redundant	Railway EN50121-4	Safety UL60950-1 EN60950-1 EN62368-1	EN61000-6-2 EN61000-6-4	CE, FCC	
IFS-402GSM-4PU	6	4	2 SFP	2 SFP	4	240W	48VDC	V	V	V	V	-10~60°C
IFS-402GSM-4PUE	6	4	2 SFP	2 SFP	4	240W	48VDC	V	V	V	V	-40~75°C

Package List

- IFS-402GSM-4PU device
- Terminal block
- Console cable (RJ-45 to DB9)
- Protective caps for SFP ports
- Din Rail with screws

Optional Accessories

Wall Mount Kit

IND-WMK02 Wall Mount kit for Industrial product (Wide) (184 x 50mm)

Industrial SFP Transceiver

The ISFP series of industrial grade SFP modules have been fully tested with the series product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications. (Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-D(E) Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-S7020-31-D(E) Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-T7T00-00-(E) Industrial SFP 10/100/1000Base-T UTP 100meter, -10~70°C (-40~85°C)

ISFP-M5002-31-D(E) Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, DDMI, -10~70°C (-40~85°C)

ISFP-S5030-31-D(E) Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, DDMI, -10~70°C (-40~85°C)

Industrial Power Supply

NDR-240-48 Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 240W, -20 ~ +70°C (for IGS-402GSM-4PU)

NDR-480-48 Industrial Power, Input 90 ~ 264VAC/127 ~ 370VDC, Output 48VDC, 480W, -20 ~ +70°C (For more ref.)

Industrial Optical Fiber Bypass Switch

IBP-202 Optical Fiber Bypass Switch