

SFP Transceivers - 2.50 Gbps

Description:

The 2.50 Gbps series are hot pluggable Small-Form-Factor (SFP) duplex, bidirectional and CWDM and DWDM transceiver modules expressly designed for high speed communication applications that requiring rates of up to 2.50 Gbps. The transceivers are manufactured with LC receptacle that is compatible with the industry LC connector standard. All SFP transceivers have the digital diagnostic monitor feature.



Features:

Specifications:

	Unit	SX	LX	HX	ZX	UX
Average output power (min / max)	dBm	-10 / -3	-5 / 0	-2 / 3	0 / 5	0 / 5
Receiver sensitivity	dBm	-18	-19	-19	-26	-31
Overload	dBm	-3	0	0	-9	-10
Maximum distance	km	0.550	20	40	80	120
Fiber type	-	MMF	SMF	SMF	SMF	SMF
Optical link budget	dBm	8	14	17	26	31
Wavelength / laser type	nm	850 / VCSEL	1310/DFB	1310 / DFB, 1550 / DFB	1550 / DFB	1550 / DFB

Temperature:

OPTOKON is always trying to satisfy as much market demand as possible and with this in mind, almost all OPTOKON SFP transceivers are manufactured in the commercial (D), extended (E) and industrial (I) temperature ranges to provide you all possibilities you need for your application.

Code	Temperature
D	0 °C to + 70 °C
E	-10°C to + 80 °C
I	-40°C to + 85 °C


Safety and regulatory compliance

Electrostatic discharge (ESD)	IEC/EN 61000-4-2
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022, Class B (CISPR 22A)
Laser Eye Safety	Class 1 laser product
Component Recognition	IEC/EN 60950, UL
ROHS	2002/95/EC
EMC	EN 61000-3

Digital diagnostics:

All OPTOKON SFP transceiver are assembled with digital diagnostic feature as a standard.

Transceiver dimensions schema

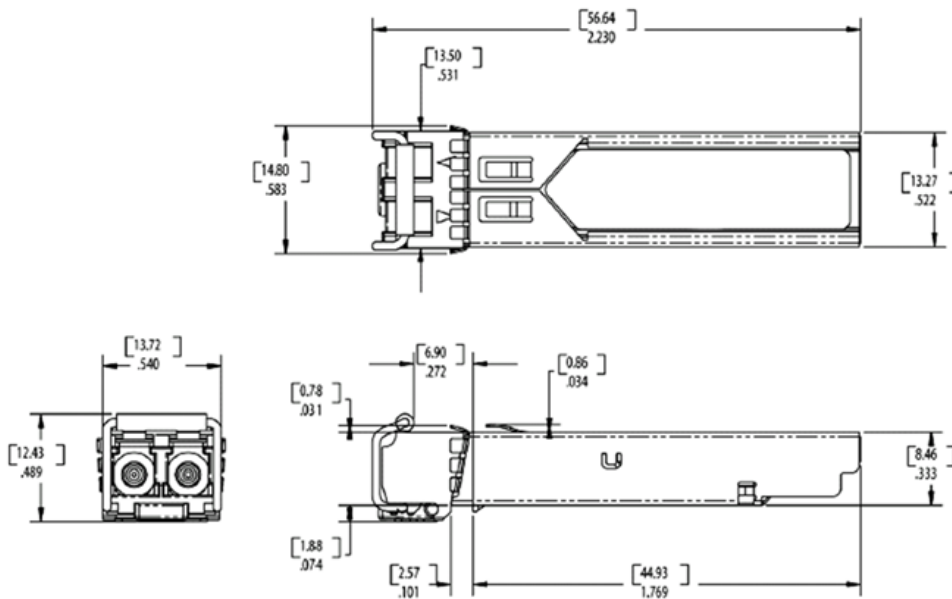

Ordering codes for 2.50 Gbps SFP transceivers:

Standard series:

Part number:	Speed [Gbps]	Distance dd [-]	Wavelength [nm]	Temperature [-]	Fiber type [-]	Connector [-]
M250-V85-LP-dd-D-XX	2.5	SX	850	D, E, I	MMF	LC
S250-D55-LP-dd-D-XX	2.5	ZX, UX	1550	D	SMF	LC
S250-D55-LP-dd-D-XX	2.5	LX, HX	1550	D, E, I	SMF	LC
S250-D31-LP-dd-D-XX	2.5	LX, HX	1310	D, E, I	SMF	LC

Bidirectional & CWDM bidirectional series:

Part number:	Speed [Gbps]	Distance - dd [-]	TX wavelength [nm]	Rx wavelength [nm]	Temperature [-]	Fiber [-]	Connector [-]
S250-W31/55-LP-dd-D-XX	2.5	LX, HX	1310	1550	D, E, I	SMF	LC
S250-W55/31-LP-dd-D-XX	2.5	LX, HX	1550	1310	D, E, I	SMF	LC
S250-Dyy/zz-LP-dd-D-XX	2.5	ZX	CWDM yy	CWDM zz	D, I	SMF	LC
S250-Dyy/zz-LP-dd-D-XX	2.5	HX	CWDM yy	CWDM zz	I	SMF	LC

CWDM series:

Part number:	Speed [Gbps]	Distance dd [-]	Wavelength [-]	Temperature [-]	Fiber type [-]	Connector [-]
S250-Cyy-LP-dd-D-XX	2.5	ZX, HX	CWDM	D, E, I	SMF	LC

DWDM series:

Part number ¹⁾ :	Speed [Gbps]	Distance dd [-]	Wavelength [-]	Temperature [-]	Fiber type [-]	Connector [-]
S250-xxxx-LP-dd-D-XX	2.5	UX, ZX	DWDM	D	SMF	LC

1)xxxx means last 4 digits in DWDM wavelength. Example: For channel C17 of DWDM use 6386 in ordering code.

CWDM & DWDM laser code:

yy/zz [-]	Wavelength [nm]	Clasp Color [-]	yy/zz [-]	Wavelength [nm]	Clasp Color [-]
27	1270	Gray	45	1450	Brown
29	1290	Gray	47	1470	Gray
31	1310	Gray	49	1490	Purple
33	1330	Purple	51	1510	Blue
35	1350	Blue	53	1530	Green
37	1370	Green	55	1550	Yellow
39	1390	Yellow	57	1570	Orange
41	1410	Orange	59	1590	Red
43	1430	Red	61	1610	Brown

Table 3: CWDM ordering code.

Distance & temperature codes

dd code [-]	Distance [km]	Code	Temperature
SX	0.550	D	0 °C to + 70 °C
LX	20	E	-10°C to + 80 °C
HX	40	I	-40°C to + 85 °C
ZX	80		
UX	120		

Table 5: Distance codes.

Table 6: Temperature codes.

ch [-]	Frequency [THz]	Wavelength [nm]	ch [-]	Frequency [THz]	Wavelength [nm]
C17	191,7	1563,86	C40	194,0	1545,32
C18	191,8	1563,05	C41	194,1	1544,53
C19	191,9	1562,23	C42	194,2	1543,73
C20	192,0	1561,42	C43	194,3	1542,94
C21	192,1	1560,61	C44	194,4	1542,14
C22	192,2	1559,79	C45	194,5	1541,35
C23	192,3	1558,98	C46	194,6	1540,56
C24	192,4	1558,17	C47	194,7	1539,77
C25	192,5	1557,36	C48	194,8	1538,98
C26	192,6	1556,55	C49	194,9	1538,19
C27	192,7	1555,75	C50	195,0	1537,40
C28	192,8	1554,94	C51	195,1	1536,61
C29	192,9	1554,13	C52	195,2	1535,82
C30	193,0	1553,33	C53	195,3	1535,04
C31	193,1	1552,52	C54	195,4	1534,25
C32	193,2	1551,72	C55	195,5	1533,47
C33	193,3	1550,92	C56	195,6	1532,68
C34	193,4	1550,12	C57	195,7	1531,90
C35	193,5	1549,32	C58	195,8	1531,12
C36	193,6	1548,51	C59	195,9	1530,33
C37	193,7	1547,72	C60	196,0	1529,55
C38	193,8	1546,92	C61	196,1	1528,77
C39	193,9	1546,12			

Table 4: DWDM ordering code.

Temperature code examples:

Code	Description
S250-D55-LP-HX-E-XX	Standard series, 1550nm, 40km, -10°C to +70°C operational temperature
S250-D55-LP-HX-I-XX	Standard series, 1550nm, 40km, -40°C to +80°C operational temperature